

Buckhead CID
West Paces Ferry Safety and Resurfacing Improvements

Addendum #2

Emailed

There were no Plans within the bid documents, will they be provided prior to the bid submission? The proposal references them.

There are no plans.

Can you please provide either a typical section for the paving scope or a detailed narrative for the paving scope that explains the expected work scope?

3.2 Miles of Milling, Inlay and Plant Mix resurfacing on West Paces Ferry Rd starting South of the I-75 SB off ramp and extending to Peachtree Rd.


This includes installation of wheelchair ramps and repair of sidewalks in various locations.

Typical section attached.

West Paces Ferry Rd

Roadway Width

32 FT – 36 FT

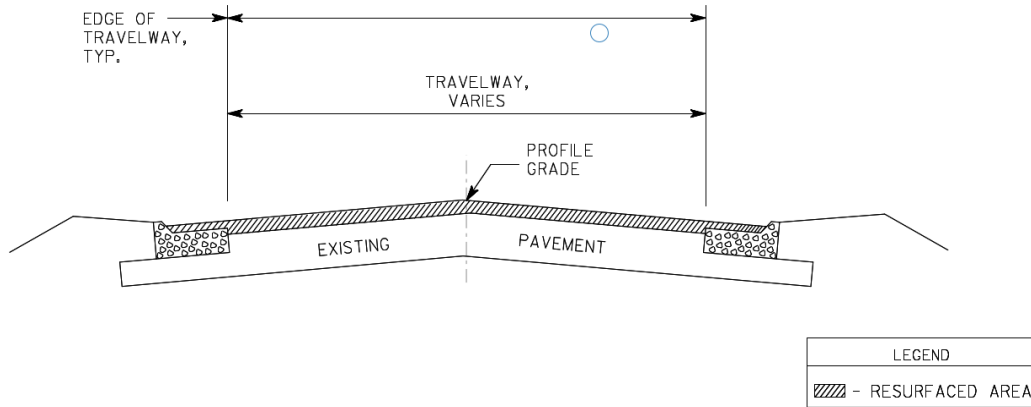

This typical section applies throughout the project

Paving Exception – Northside Drive Intersection

Maintain Existing Cross -Slope

Mill Roadway Full Width Variable Depth (4")

Resurface Roadway Full Width with 2" RECYCLED ASPH CONC 19 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME and 2" RECYCLED ASPH CONC 12.5 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME

Ensure Smooth Tie-In at All Begin and End Mill Locations